



**Сојуз на хемичарите и технолозите на Македонија**  
**Society of Chemists and Technologists of Macedonia**

**XXIV Congress**  
**with international participation**

# **BOOK OF ABSTRACTS**

**11-14 September 2016**

**Ohrid, R. Macedonia**

**Metropol Lake Resort**

EC 003

**CORE@SHELL-STRUCTURED BINARY TiO<sub>2</sub>@RuO<sub>2</sub> OXIDE  
SYNTHESIZED BY SPRAY PYROLYSIS FOR  
ELECTROCHEMICAL APPLICATIONS**

Nataša Vukićević<sup>1</sup>, Vesna Cvetković<sup>1</sup>, Srećko Stopić<sup>2</sup>, Jasmina Stevanović<sup>1</sup>, Vladimir Panić<sup>1</sup>,  
Bernd Friedrich<sup>2</sup>


e-mail: panic@ihm.bg.ac.rs

1-Institute of Chemistry, Technology and Metallurgy, University of Belgrade, Belgrade, Serbia

2-IME Process Metallurgy and Metal Recycling, RWTH Aachen University, Germany

The binary TiO<sub>2</sub>-RuO<sub>2</sub> oxide is well-known constituent of the activated titanium anodes (ATA), crucial for their excellent electrocatalytic properties. There are efforts to improve the oxide synthesis procedure for highly controllable structural and consequently electrochemical performances of ATA coatings. Novel synthesis of sub-micron-sized binary oxide particles in the TiO<sub>2</sub> core-RuO<sub>2</sub> shell form (60 at.% Ru) was achieved by ultrasonic spray pyrolysis method. Basic electrochemical properties of the obtained TiO<sub>2</sub>-RuO<sub>2</sub> powders were investigated in its form of a thin layer on glassy carbon deposited from the water suspension of synthesized powder. The methods used to clarify the porous layer properties upon subsequent thermal treatment in air, as required for the formation of ATA coating or supercapacitor formation, were cyclic voltammetry (CV) and electrochemical impedance spectroscopy (EIS) in acid solution. Fig. 1 presents the CVs of the synthesized oxide and the effects of subsequent drying or annealing on CV currents. The shape of CVs is typical for pure RuO<sub>2</sub> with proton-assisted redox transition response, which indicates successful core-shell structure formation. The CV shape of as-synthesized and dried TiO<sub>2</sub>@RuO<sub>2</sub> is mimicking that of hydrated RuO<sub>2</sub>, whereas the annealing produces the CV response of rutile structure. The subsequent thermal treatment causes the decrease in CV currents. The results are comparable to CV response of commercial hydrated RuO<sub>2</sub>; however, the decrease in CV currents upon drying is less pronounced for the synthesized sample due to the placement of active RuO<sub>2</sub> on TiO<sub>2</sub> core. It appears that the core is able to supply active O sites for good proton conductivity of the dried RuO<sub>2</sub> in the shell.

**Key words:** electrochemically active metal oxides, activated titanium anodes, pseudocapacitance, electrochemical impedance spectroscopy.

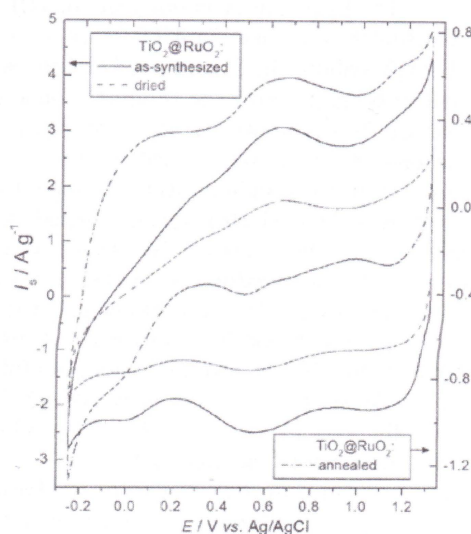

**Fig. 1.** CVs of TiO<sub>2</sub>@RuO<sub>2</sub> synthesized by ultrasonic spray pyrolysis and subsequently dried (120 °C, 24 h) or annealed (450 °C, 30 min); 1 M H<sub>2</sub>SO<sub>4</sub>, 50 mV/s.

n.b.: Manuscripts submitted to this Congress were not subjected to language or other corrections, except in some extreme cases. Authors are fully responsible for the content of their Abstracts.

CIP - Каталогизација во публикација  
Национална и универзитетска библиотека "Св. Климент  
Охридски", Скопје

54(062)(048.3)

66(062)(048.3)

CONGRESS of the society of chemists and tecnologists of Macedonia  
(24 ; 2016 ; Ohrid)

Book of abstracts / XXIVth Congress of the society of chemists and  
tecnologists of Macedonia (with international participation) 11-14  
September 2016 Ohrid, R. Macedonia, Metropol Lake Resort ; edited by  
Svetomir Hadzi Jordanov and Elena Tomovska. - Skopje : Society of  
chemists and tecnologists of Macedonia, 2016. - 340 стр. : илустр.  
; 21 см

Регистар

ISBN 978-9989-760-13-6

1. Гл. ств. насл.

а) Хемија - Собири - Апстракти б) Технологија - Собири -  
Апстракти

COBISS.MK-ID 101625866